
MECHANICAL CONNECTORS

'USMB/FPL-X-C-B2' Copper 'Y' Connector

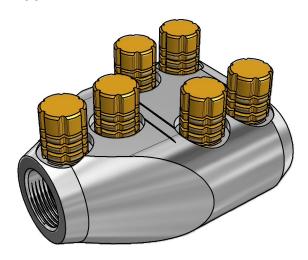

Principle Application:

'Y' Branch jointing of circular copper or aluminium stranded conductors.

Range:

Connector Reference	Stranded Core Size				
	2 x Main		1 x Tap		
	Min	Max	Min	Max	
USMB/FPL-2-C-B2	350 kcmil	750 kcmil (380mm²)	#3 (27mm²)	350 kcmil (177mm²)	
USMB/FPL-4-C-B2	2/0 (67mm²)	500 kcmil (253mm²)	2/0 (67mm²)	500 kcmil (253mm²)	

The **'USMB'** range of mechanical 'Y' connectors incorporate an integral moisture/ contaminant block and utilise the patented MK2 solid universal range taking brass shear bolts. (USA Patent No's 6209424 & 6321624)


The appropriate socket is to be used at all times, typical examples shown below.



'JTS/26' 1/2" sq Driver

'USMB/FPL-X-C-B2 Copper 'Y' Connector

Physical Dimensions:

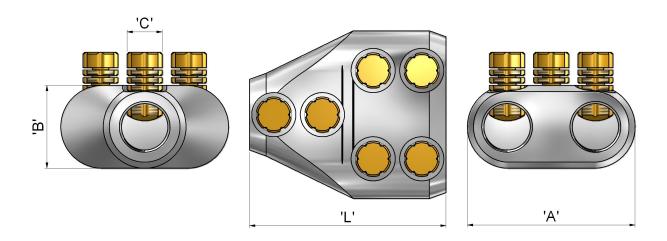

Connector Reference	Dimensions				
	'L'	'B'	'A'	Ó,	
USMB/FPL-2-C-B2	3.50" (89mm)	1.48" (37.5mm)	3" (76mm)	M16	
USMB/FPL-4-C-B2	3.50" (89mm)	1.48" (37.5mm)	3" (76mm)	M16	

Material: Copper (Electro-Tinned)

Test Specification: ANSI C119.4 Class 2 Partial Tension / IEEE 404

Fitting instructions:

- 1. Strip insulation from each core equal to the depth of the bore.
- 2. Wire brush the exposed conductor cores and wipe clean (optional).
- Align and position the conductor cores in each of the bores ensuring that the core is fully inserted to the centre wall.
- 4. Fit the universal shear screws within the connector and torque tighten one turn at a time, using the correct socket, until the bolts have sheared.