


Mechanical In-Line Splice
with Moisture/Contaminant
Block for Medium/High
Voltage Applications

MECHANICAL CONNECTORS

'USMF-C' Copper In-Line Splices

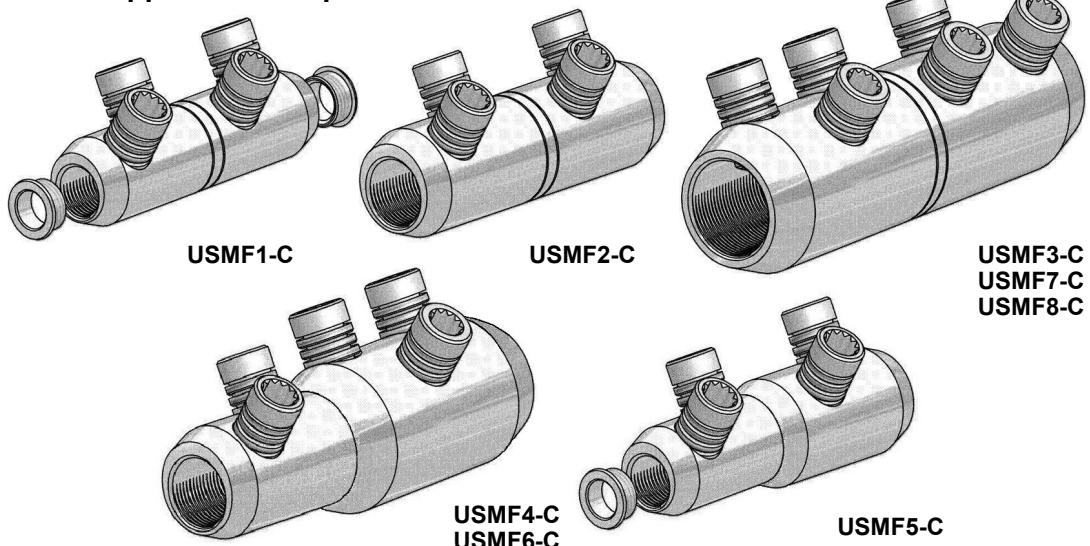

Principle Application:

Straight jointing of circular stranded aluminium or copper conductors for all cable voltages up to and including 46KV.

Range:	Connector Reference	Stranded Core Size			
		Min	Max	Min	Max
	USMF1-C*	# 2 (34mm ²)	250 kcmil (127mm ²)	# 2 (34mm ²)	250 kcmil (127mm ²)
	USMF2-C	2/0 (67mm ²)	500 kcmil (253mm ²)	2/0 (67mm ²)	500 kcmil (253mm ²)
	USMF3-C	500 kcmil (253mm ²)	1000 kcmil (507mm ²)	500 kcmil (253mm ²)	1000 kcmil (507mm ²)
	USMF4-C	1/0 (53mm ²)	500 kcmil (253mm ²)	500 kcmil (253mm ²)	1000 kcmil (507mm ²)
	USMF5-C*	# 2 (34mm ²)	250 kcmil (127mm ²)	4/0 (107mm ²)	500 kcmil (253mm ²)
	USMF6-C	4/0 (107mm ²)	350 kcmil (177mm ²)	350 kcmil (177mm ²)	750 kcmil (380mm ²)
	USMF7-C	350 kcmil (177mm ²)	750 kcmil (380mm ²)	350 kcmil (177mm ²)	750 kcmil (380mm ²)
	USMF8-C	800 kcmil (400mm ²)	1250 kcmil (630mm ²)	800 kcmil (400mm ²)	1250 kcmil (630mm ²)

The 'USMF' range of mechanical connectors incorporate an integral moisture/contaminant block and utilise the patented universal range taking shear bolts.

(USA Patent No's 6209424 & 6321624)

The appropriate socket is to be used at all times, typical samples shown below.




'JTS/9½" sq Driver

Mechanical In-Line Splice
with Moisture/Contaminant
Block for Medium/High
Voltage Applications

'USMF-C' Copper In-Line Splices

Physical Dimensions:

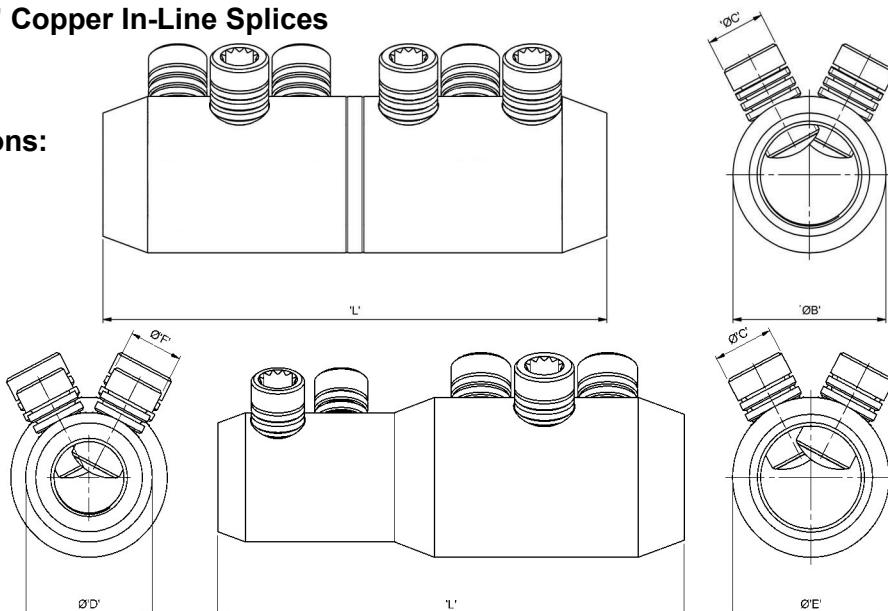

Connector Reference	Dimensions					
	'L'	'ØB'	'ØC'	'ØD'	'ØE'	'ØF'
USMF1-C*	3.98" (101mm)	1.10" (28mm)	M16	N/A	N/A	N/A
USMF2-C	4.37" (111mm)	1.34" (34mm)	M16	N/A	N/A	N/A
USMF3-C	6.10" (155mm)	1.85" (47mm)	M18	N/A	N/A	N/A
USMF4-C	5.51" (140mm)	N/A	M18	1.50" (38mm)	1.85" (47mm)	M16
USMF5-C*	4.33" (110mm)	N/A	M16	1.14" (29mm)	1.34" (34mm)	N/A
USMF6-C	5.33" (135.5mm)	N/A	M18	1.25" (32mm)	1.47" (37.5mm)	M16
USMF7-C	5.70" (145mm)	1.47" (37.5mm)	M18	N/A	N/A	N/A
USMF8-C	6.10" (155mm)	2.00" (50.8mm)	M18	N/A	N/A	N/A

Material: Copper (Electro-Tinned)

Test Specification: ANSI C119.4 Class 2 Partial Tension

Test Report No: TBA

Fitting instructions:

1. Strip insulation from each core equal to the depth of the bore.
2. Wire brush the exposed conductor cores and wipe clean (optional).
3. Align and position the conductor cores in each of the bores ensuring that the core is fully inserted to the centre wall.
4. Fit the universal shear screws within the connector and torque tighten one turn at a time, using the correct socket, until the bolts have sheared.

***IMPORTANT:** When using the USMF1-C and USMF5-C the centralising ring must be used on cable sizes #2 to 2/0 AWG, inclusive.

©COPYRIGHT

Sicame UK Ltd operates a continuous product design development and improvement programme and offers active co-operation establishing satisfactory procedures and systems to meet new or unusual jointing situations. The company reserves the right to introduce modifications to the above designs and specifications without prior notice.

sicame
UK